

# VR1A-FS

## One Section Full Solid Door Refrigerator

W x D x H

26.88" x 32.00" x 81.70"  
including 4" casters)



### Dimensions / Capacity

Interior Storage Capacity (CF) (AHAM)

19.07 ft<sup>3</sup>

Overall Width x Depth

26.88" x 32.00"

Height (including 4" casters)

81.70"

Door Opening (W x H)

26.54" x 52.31"

Depth with Door Open at 90°

57.87"

Adjustable Shelves

3

Shelf Dimensions (W x D)

21.56" x 24.88"

Crated Shipping Weight

286 lbs

Crated Length x Depth x Height

33.50" x 28.75" x 83.88"

### Electrical / Refrigeration

Voltage

115/60/1

HACR Breaker

15.0 Amps

Electrical Connection (NEMA)

5-15P

Voltage Range

103-127

Ambient Temp. Range

45° to 100°F

Control Setpoint Range

36° to 42°F

Amperage

2.1

Energy Consumption (kWh/day) @ASHRAE

0.96

Appox. Nominal Compres. BTU/HR (HP)

1461

Refrigerant / Charge Amount (oz.)

R290 / (2.65oz)

### Options

- Full Tray Pan Rack, 16 Pan Capacity (HS-5786)
- Half Tray Pan Rack, 8 Pan Capacity (HS-5787)
- Single Section UR Self, 1 pack (HS-5788)
- Single Section UR Shelf, 3 pack (HS-5789)

### Warranty

3 Year - labor on entire machine  
4 Year - parts on entire machine  
5 Year - parts on Compressor

Valid in United States, Canada, Puerto Rico and U.S. Territories. Contact factory for warranty in other countries.

# VALIANCE.

by HOSHIZAKI

Item #: \_\_\_\_\_

Project: \_\_\_\_\_

Qty: \_\_\_\_\_

AIA#: \_\_\_\_\_

## FEATURES

- Rear-Ducted Air-Flow ensures even cooling throughout entire cabinet
- Energy efficient interior LED light
- Environmentally friendly R290 hydrocarbon refrigerant
- Fits full size tray pans
- 3, 4, 5 Warranty
- Stay-open door(s) is field reversible - no kit needed
- Cabinet and doors are insulated with 2 5/16" of CFC free, foamed in place polyurethane
- Exterior - Stainless steel doors, DualGuard™ Coated steel sides
- Interior - Stainless steel floor, aluminum sides, rear and top
- SmartCheck™ time initiated and time or temperature terminated automatic defrost
- Energy efficient heated condensate removal
- Heavy duty grey epoxy coated shelves are adjustable in 1/2" increments; 3 per section
- Standard with 4" casters (two with brakes)
- 9 ft. cord and plug
- Container Qty: 44

If GFCI is required, a GFCI breaker MUST be used in lieu of GFCI receptacle

*We reserve the right to change specifications without notice.*

# VR1A-FS


One Section Full Solid Door Refrigerator

VALIANCE®


by  HOSHIZAKI

VR1A-FS  
09/09/25  
Item #13735

## FRONT VIEW

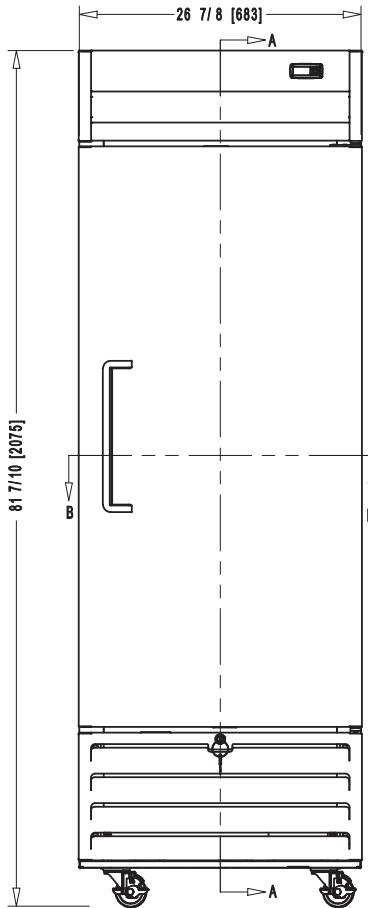

## SIDE VIEW

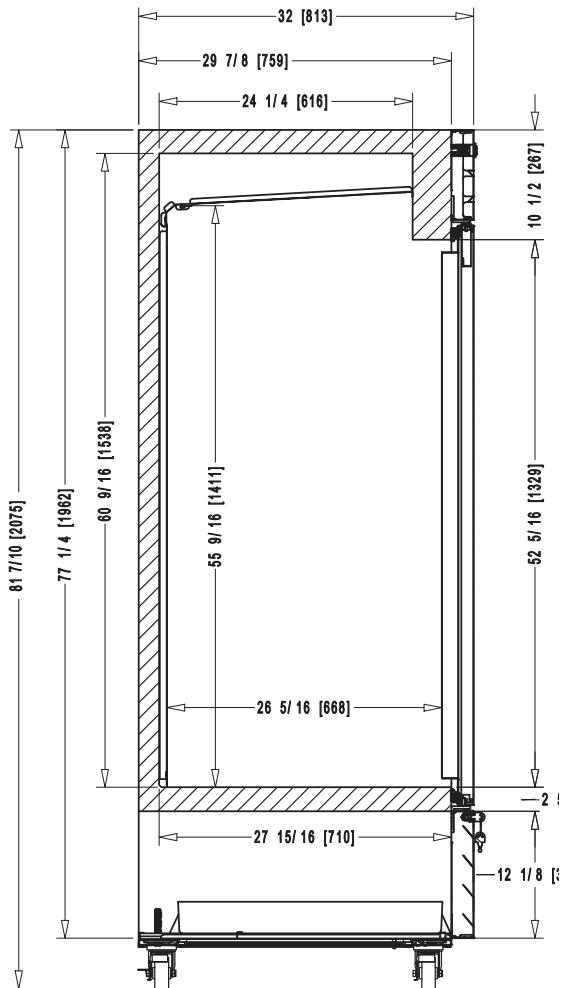

## PLAN VIEW

