



# HURAKAN

# Freezer Reach-In HKN-GXE18F1C

Item #: HKN-GXE18F1C

Project: \_\_\_\_\_

Qty: \_\_\_\_\_

Date: \_\_\_\_\_

Approval: \_\_\_\_\_



## Features

- ✓ Stainless steel interior & exterior with aluminum back.
- ✓ Bright white aluminum interior option.
- ✓ Electronic control for temperature & defrost adjustment.
- ✓ Keeps food at -8°F–0°F.
- ✓ Heavy-duty casters with brakes.
- ✓ Self-closing doors (90° stay-open) with locks & keys.
- ✓ Removable panel for easy condenser access.
- ✓ Customizable handles & control panels.
- ✓ Adjustable PVC-coated shelves.

## Technical Data

Width	27 Inches
Depth	32 1/8 Inches
Height	81 2/8 Inches
Power Cord Length	98 3/8 Inches
Interior Width	22 1/8 Inches
Right Door Opening Width	26 3/8 Inches
Interior Depth	25 2/8 Inches
Interior Height	58 2/8 Inches



ETL, US



5-15P



ETL Sanitation

Instructions and images in this manual are only for reference and may differ from the actual product. Launch the E-Manual.

[www.equip.me](http://www.equip.me)



## Technical Data


Hertz	60 Hertz
Phase	1 Phase
Voltage	115 Volts
Access Type	Doors
BTU (LBP)	2200 BTU
Capacity	19 cu.ft.
Compressor Location	Bottom Mounted
Construction	All Stainless Steel
Door Style	Swing / Without Dutch Half Doors
Door Type	Solid
Features	LED Lighting
Installation Type	Freestanding
Horsepower	3/5 HP
Amps	7.0 A
Number of Doors	1 Door / Right
Number of Shelves	3 Shelves
Plug Type	NEMA 5-15P
Refrigerant Capacity	3.53 oz.
Refrigerant Type	R-290
Style	Counter Height
Temperature Range	-8 ~ 0 Degrees F
Casters	With Casters (2 with brakes)
	Freezer Reach-In



# HURAKAN

FREEZER REACH-IN  
HKN-GXE18F1C

## Plan View

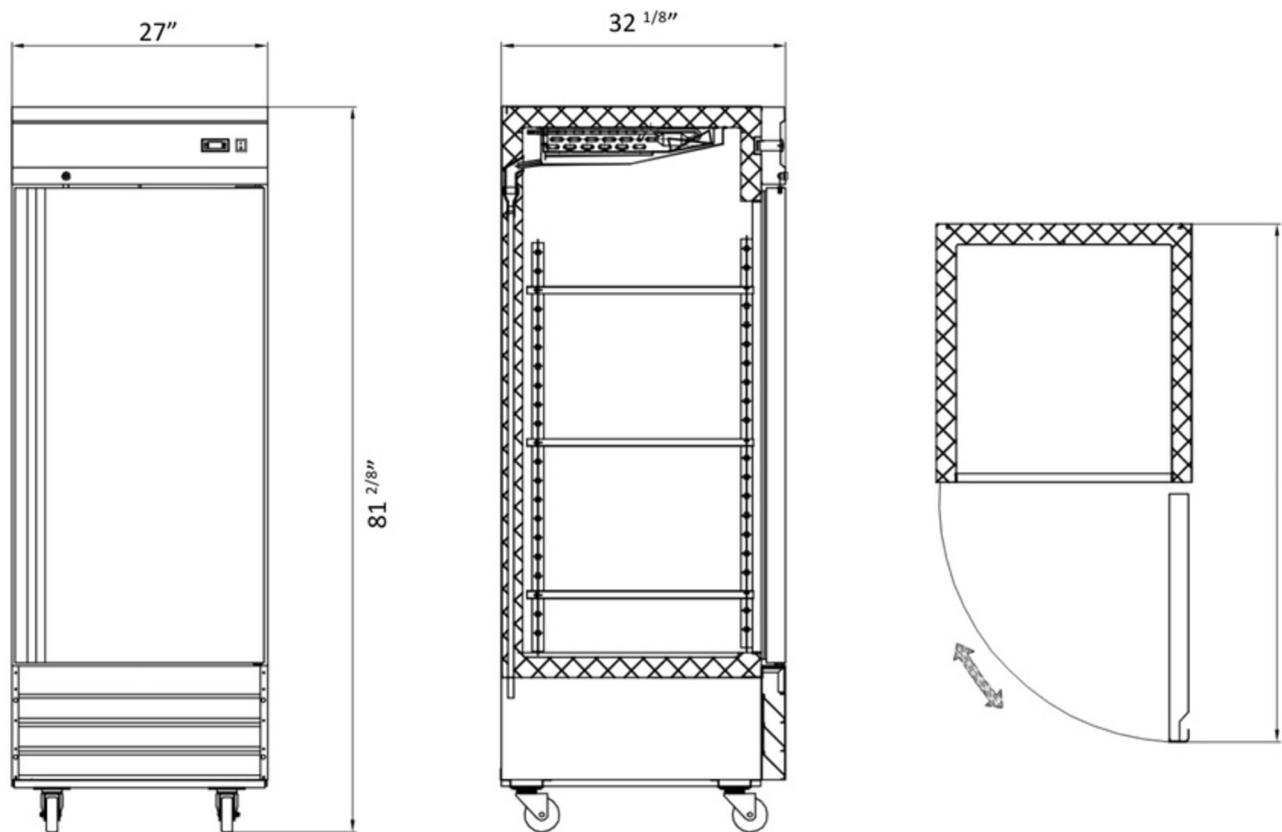



## Notes & Details

### 1. Durable & Functional Design

- Stainless steel interior & exterior for durability and easy cleaning.
- Swing doors with self-closing mechanism to prevent temperature loss.
- Heavy-duty casters (2 with brakes) for mobility and stability.
- LED lighting for clear interior visibility.
- Freestanding installation for easy placement.

### 2. Cooling & Performance

- Refrigerators: Maintain 33°F – 40°F for fresh food storage.
- Freezers: Maintain -8°F – 0°F for frozen goods.
- Electronic control panel for precise temperature adjustments.
- Defrost system for efficient operation.

### 3. Storage & Capacity

- Single-section models: 17.2 cu. ft. with 3 adjustable shelves.
- Two-section models: 41.9 cu. ft. with 6 adjustable shelves.

### 4. Refrigeration System

- Eco-friendly R-290 refrigerant for energy efficiency.
- Horsepower range: 1/5 HP to 3/4 HP, depending on model.
- BTU Output: 1100 – 3250 for powerful cooling.
- Bottom-mounted compressor for better efficiency and easy access.

### 5. Electrical & Power

- Voltage: 115V / 60Hz / 1 Phase for standard commercial use.
- Amps: 3.4A – 8.7A, model-dependent.
- Standard plug type for easy installation.

#### Ideal for:

- ✓ Restaurants, cafés, bakeries, and catering businesses.
- ✓ Commercial kitchens needing reliable refrigeration and freezing.
- ✓ Businesses looking for durable, energy-efficient, and user-friendly cooling solutions.

#### ETL Sanitation



This product has been certified by ETL, a division of the Intertek Group, to meet applicable sanitation standards required for use in the United States and Canada.

#### 5-15P



This unit comes with a NEMA 5-15P plug

#### ETL, US



This product has been certified by ETL, a division of the Intertek Group, to meet applicable electrical product safety standards required for use in the United States.